



HAND
HAND ENGINEERING LTD



**Zero Grazing
Machine Range**

MiniGrazer GH45 GH50 GH55 GH60 GH65 GH70 GH75 GH80 GH85 GH90 GH100

email: sales@handengineering.com . web: www.handengineering.com




Standard Specification

- Four floor chains hydraulically driven.
- Two hydraulic cylinders lifting elevator.
- Unique floating system on floor.
- 300mm ground clearance.
- Adjustable mowing height.
- Pivoting bogey axle.
- Galvanised floor and side sheeting.
- Safety latch on mower and drawbar for road transport.
- In cab electronic controls.
- Telescopic drawbar support.
- Hydraulic or Air brakes and cable parking brake.
- Double wide angle PTO shaft.
- L.E.D. rear lights.
- Shotblasted.
- Two pack primer and paint.

Optional Extras

- Rear view camera to aid filling, unloading and reversing.

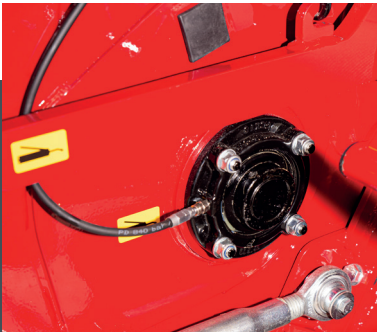

50mm Shaft & Bearings



Telescopic Drawbar Support



Heavy Duty Door



Hydraulic Moving Floor



Hydraulic Cylinder Lifting



Floatation 500/620/710 tyres



Model No.	Capacity m3	Mower Type	Mower Width (mm)	Elevator Width (mm)	Track Width (mm)	Chassis Width (mm)	Body Width (mm)	Body Length (mm)	Overall Height (mm)	Wheel Width (mm)
Mini	4.5	Drum	1850	1250	1800	1580	1660	1550	2700	500
GH45	17	Drum	1850	1250	1800	1580	1660	4670	2850	500
GH50	20	Drum	2100	1250	1800	1580	2000	5036	3120	500
GH55	22	Drum	2100	1250	1800	1920	2000	5036	3120	620
GH60	22	Disc	2200	1250	1800	1920	2000	5036	3120	620
GH65	22	Disc	2200	1250	1800	1920	2000	5036	3120	710
GH70	32	Drum	1850	1250	1800	1580	2000	5420	3120	500
GH75	36	Drum	2100	1250	2000	1920	2000	5420	3120	500
GH80	42	Disc	2200	1250	2050	1920	2000	5420	3550	620
GH85	48	Disc	2600	1450	2050	2000	2280	5755	3550	620
GH90	50	Disc	2600	1450	2400	2200	2280	5755	3550	710
GH100	56	Disc	2600	1450	2400	2320	2400	6290	3780	710

+00 353 44 9666 504 · www.handengineering.com · email: sales@handengineering.com

Hand Engineering Limited, Dromone, Oldcastle, Co. Meath, Ireland A82 K2P6